

ROHS CE IP44

- Recessed fixed downlight
- Deep Conical die cast aluminium housing for low glare
- Recessed polycarbonate diffuser gives a symmetrical wide beam distribution with high lumen output
- Tempered glass providing IP44 protection
- Leading & trailing edge or DALI driver
- Ideal for Foyers, Hotels, Corridors, Function Rooms, Medical and General Lighting




Code	Wattage	Colour Temp	Lumens	Cut Out
LED10040	14W	4000K	1000 Lm	100mm
LED10042	21W	4000K	1500 Lm	125mm
LED10044	24W	4000K	1800 Lm	150mm
LED10046	36W	4000K	3000 Lm	175mm

Trim Colours ☐ W ☐ B

Available Driver Options Tridonic Non-dimmable driver
OSRAM Trailing and Lead Edge Dimmable driver
OSRAM DALI Driver

Luminous Intensity Distribution Diagram

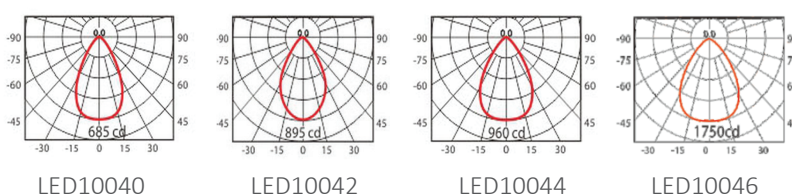

Diameter:	113mm	140mm	165mm	194mm
Depth:	84mm	105mm	114mm	114mm
Cut out:	100mm	125mm	150mm	175mm
Color Rendering Index (CRI):	85			
Colour Temp (CCT):	3000K 4000K			
Beam Angle:	70°			
Power Consumption:	14W	21W	24W	36W
Power Factor:	> 0.95			
Lumen of Chip & Luminaire:	1000Lm	1500Lm	1800Lm	3000Lm
Dimmable:	Trailing & Leading Edge, DALI			
Lifespan:	Up to 50,000 hrs (L70/B10)			

* IES Files are available on request