

LUMI F-5


TECHNICAL SPECIFICATIONS



SVL Lighting



OSRAM



Description:

- LUMI F-5 is designed to improve the concept of the standard downlight, with high power OSRAM LED and baffle design, providing comfort, circular and anti glare distribution.
- Architecturally designed LED linear recessed directional downlight
- OSRAM Driver
- Recessed ceiling mounted
- Segment option: 5, 10 or 15 lamps
- Powder coated seamless finish
- Applications: hospitality, commercial, retail, residential and gallery spaces
- 5 years warranty

Dimensions: (L)147mm x (W)45mm x (H)47Hmm

Model: Fixed recessed downlight x 5 lamps

Cut out: 140mm x 38mm

Power: 12w (2.4w*5)

Lumens 1200lm

Colour Temp: 3000K/4000K


Body finish: White/Black
Baffle: Black/White/Piano Black

CRI: >90

Beam angles: 15°, 30°, 45°

Dimmable DALI, TRIAC,1-10V

Life Span: Up to 50,000 hours

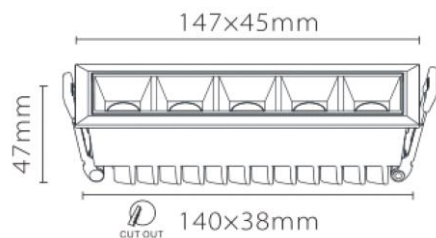

| Order Code | Wattage | Beam Angle | Colour Temp | Trim color | Baffle Color |
|------------|---------|------------|-------------|------------|--------------|
| LUMF1234WB | 12W | 45° | 3000K | W | B |
| LUMF1233BB | 12W | 30° | 4000K | B | B |

- Please contact our sales team for specific requirements and order code