

# FLEX LED STRIP CRI 90+



SVL Lighting

## TECHNICAL SPECIFICATIONS



24V IP20


- 24V, CRI >90 Flexi LED Strip
- Ideal for application for under bench lighting in kitchens or any area that require strip lighting to provide extra illumination

Code	Wattage	Color Temp	CRI
FLX4220	4.8W/m	2700K	90+
FLX9320	9.6W/m	3000K	90+
FLX9620	9.6W/m	6000K	90+
FLX14420	14.4W/m	4000K	90+
FLX14320	14.4W/m	3000K	90+
FLX19620	19.2W/m	6000K	90+
FLX19420	19.2W/m	4000K	90+


### AVAILABLE ACCESSORIES

Aluminum extrusion and Opal diffuser are available on request

### TRIM COLOURS



### AVAILABLE PROFILES

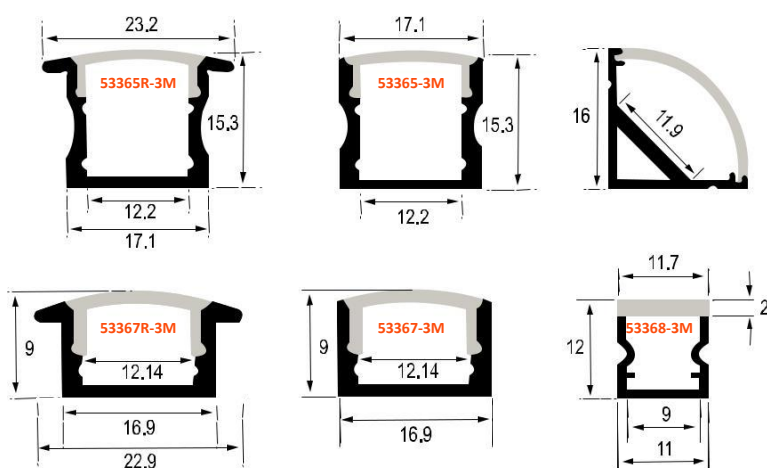

**Diameters:** H: 4mm W: 8mm & 10mm 5M/roll

**Cut out:** Custom Made

**Color Rendering Index (CRI):** 90+

**Color Temp:** 2700K 3000K 4000K 6000K

**Beam Angle:** 100°

**Power Consumption:** 4.8W/m  
9.6W/m  
14.4W/m  
19.2W/m

**Power factor:** > 0.90

**Lumen of Chip & Luminaire** 480lm/m  
960lm/m  
1450lm/m  
1950lm/m

**Dimmable:** Available on request

**Lifespan:** Up to 50,000 hrs

\* IES Files are available on request