


BONGO 150



SVL Lighting

TECHNICAL SPECIFICATIONS




- Surface mounted downlight
- Special Optic reflector, precise light distribution
- No glare with soft and tender light
- No UV, good heat dissipation
- Ideal for applications in shopping mall, foyers, hotels, corridors, function rooms, living area,

Order Code	Wattage	Beam Angle	Colour Temp	Trim colour
BONB153W	8W	90°	3000K	W
BONB154W	8W	90°	4000K	W

* Please contact our sales team for specific requirements and order code

Dimensions:	Ø 150mm x 60mm
Cut out:	Surface mounted
Power Consumption:	15w
Finish Colour:	White
CRI:	>80
Colour Temp:	3000K,4000K
Power Factor:	>0.9
Lumens	1200lm
Beam Angle:	90°
Dimmable:	DALI,TOUCH DIM,1-10V
Life Span:	50,000 hrs

Luminous Intensity Distribution Diagram

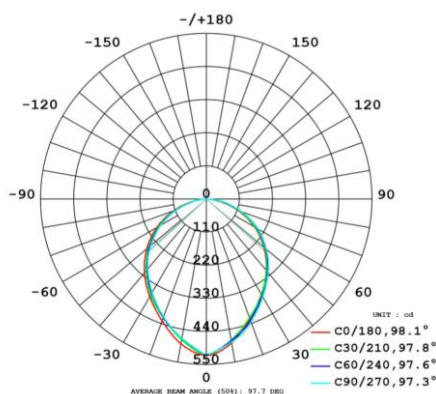

* IES Files are available on request

