


SENTO SQ

TECHNICAL SPECIFICATIONS



SVL Lighting



- Recessed fixed downlight
- Deep conical housing for low glare
- Minimal trim to integrate with ceiling
- Clear tempered glass
- IP20 LED Module
- Leading & trailing edge driver
- Ideal application in Foyers, Hotels, Corridors, Function rooms, Living areas, Kitchens and Bedrooms




Code	Wattage	Colour Temp	Trim	Lumens
SENSQ133W	13.5W	3000K	W	950lm
SENSQ134W	13.5W	4000K	W	950lm
SENSQ133B	13.5W	3000K	B	950lm
SENSQ134B	13.5W	4000K	B	950lm

Trim Colours W B

Depth:	90mm
Dimensions:	95mm x 95mm
Cut out:	85mm
Trim Colours:	White / Black
Colour Rendering Index (CRI):	95
Colour Temp (CCT):	2700K, 3000K, 4000K
Beam Angle:	15°, 25°, 38°, 60°
Power Consumption:	13.5W @ 300mA
Power Factor:	> 0.9
Lumen of Chip & Luminaire	950lm
Dimmable:	DALI, DSI, Touch Dim, 1-10V
Lifespan:	Up to 50,000 hrs

Luminous Intensity Distribution Diagram

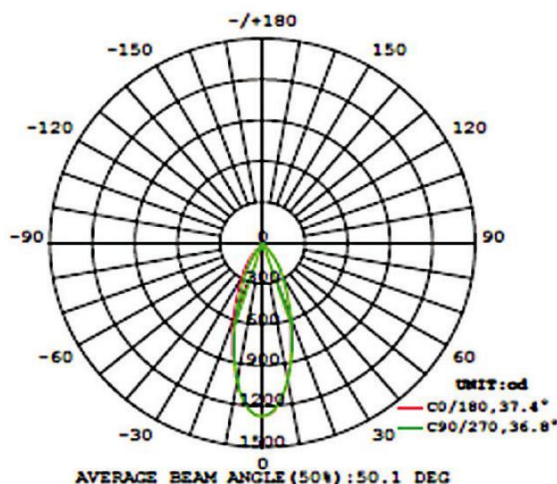

* IES Files are available on request