

ZEUS A SQ

TECHNICAL SPECIFICATIONS




SVL Lighting



ROHS CE e IP67

- Adjustable Exterior Inground Uplight
- 316 Stainless Steel Cover with Die Cast Body
- IP67/68 1M, Static Force 20KM and IK10 protection
- Deep Conical Reflector provides low glare
- 355° rotation with 30° Tilt
- Honey Comb, Elliptical Lens accessories available
- H05RN-F1-3G Cable 1000mm
- Ideal for landscape, walkways and wall washing

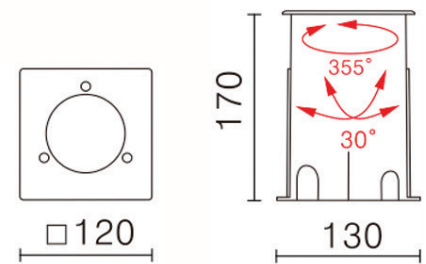

CODE	WATTS	CRI	COLOUR TEMP	LUMENS
ZEA53SQ	5.4W	>80	3000K	750lm
ZEA54SQ	5.4W	>80	4000K	750lm

POWER CONSUMPTION 5.4 Watts

IP RATING IP67/IP68 Force 20KN & IK10

LUMINOUS FLUX 750lm

EFFICACY 130 lm/w

BEAM ANGLE 15°, 24°, 36° & 50°

TILT 355° rotation with 30° tilt

COLOUR TEMPERATURE 3000k & 4000K

CRI >85

DIMENSIONS 120mm x 130mm x 170mm


POWER FACTOR >0.90

POWER SUPPLY 100-240V 50-60Hz

LIFE SPAN 50,000 Hrs

LIGHT DISTRIBUTION

AVAILABLE ACCESSORIES

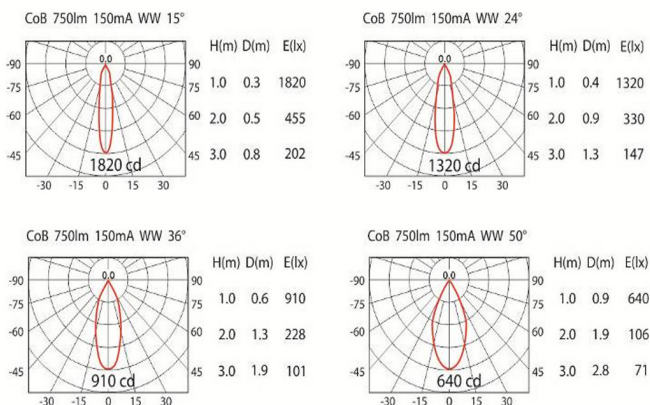

* IES files are available on request