

SNAKE FLEX EDGE 1120



SVL Lighting

TECHNICAL SPECIFICATIONS




IP67/IP68

- Horizontal Bend-able, Body Lighting
- Philips Lumileds LED Chip
- Dual Colour extrusion, diffused silicone lens and thermal conductive base
- UV and Yellowish Resistant
- Up to IP68 and salt-mist proof
- L70 B50 >50000hrs
- UL 94 V-0
- Easy installation and re-connect accessories
- Ideal for facades, landscapes, sporting facilities and pathways




Dimensions:

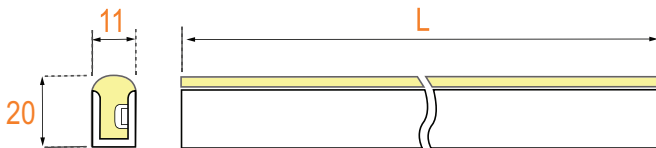


- Notes:
 1. Unit: mm
 2. L = 10meters in Standard configuration

Dimensions:	20mm x 11mm
Length:	10 meter/roll
Cut out:	N/A
Trim Colours:	White Silicone
Colour Rendering Index (CRI):	80+
Colour Temp (CCT):	2700K 3000K 4000K 6000K
Beam Angle:	100°
Power Consumption:	12W/m
Power factor:	> 0.90
Lumen of Luminaire	500lm/m
Dimmable:	1-10V, DALI
Lifespan:	Up to 50,000 hrs

Available Accessories:

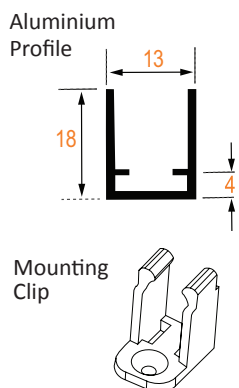

Functionality Diagram:

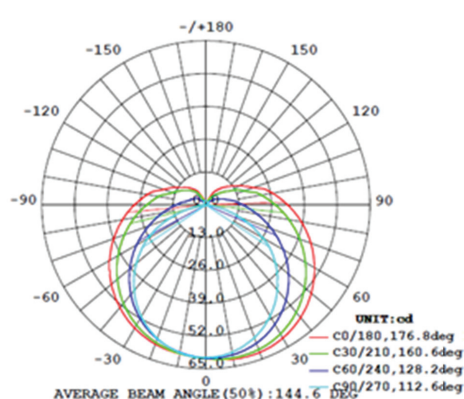

* IES Files are available on request