


HERMES B

TECHNICAL SPECIFICATIONS



SVL Lighting

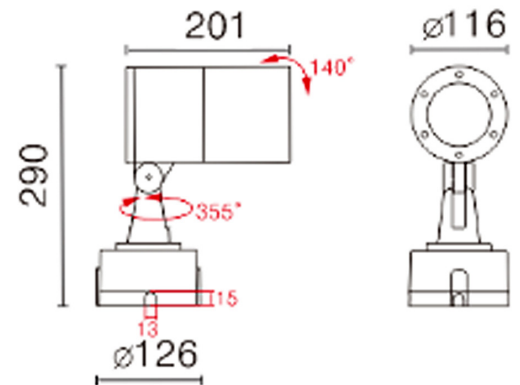


ROHS CE IP66

- Elegant Exterior LED adjustable spotlight.
- Pressure Die Cast Aluminium Body.
- IP66 and IK06 protection.
- Deep Conical Reflector provides low glare.
- 355° rotation with 140° Tilt.
- Honey Comb & Elliptical Lens accessories available.
- Ideal for highlighting building facades, architectural features, landscape & security lighting.


POWER CONSUMPTION	17.5 WATTS
IP RATING	IP66 IK06
LUMINOUS FLUX	2100 LM
EFFICACY	120 LM/W
BEAM ANGLE	15°, 24° & 36°
COLOUR TEMPERATURE	355° ROTATION WITH 140° TILT
CRI	3000K & 4000K
MOUNTING ARRANGEMENT	>85
DIMENSIONS	Ø 80MM x 160MM
POWER FACTOR	>0.90
POWER SUPPLY	100-240V 50-60Hz
LIFE SPAN	50,000 HRS

CODE	WATTS	CRI	COLOUR TEMP	LUMENS
HER173B	17.5W	>80	3000K	2100lm
HER174B	17.5W	>80	4000K	2100lm

LIGHT DISTRIBUTION

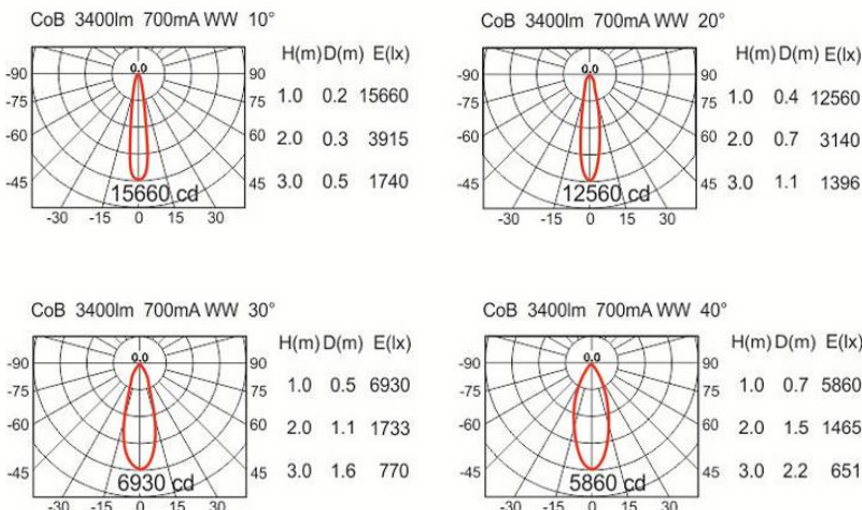

AVAILABLE ACCESSORIES



* IES files are available on request