

LUMI A-5

TECHNICAL SPECIFICATIONS



SVL Lighting



OSRAM




Description:

- LUMI -A is designed to improve the concept of the standard downlight, with high power OSRAM LED and baffle design, providing comfort, circular and anti glare distribution.
- Architecturally designed LED linear recessed adjustable downlight/wall washer
- OSRAM LED chip
- In 15°, 30°, 45° beam angle with 25° tilt
- Segment option: 5, 10 or 15 lamps
- Powder coated seamless finish
- Applications: hospitality, commercial, retail, residential and gallery spaces

Dimensions:	158mm x 62mm x 50mm
Model:	Adjustable recessed Downlight /wall washer
Cut out:	150mm x 50mm
Power Consumption:	12w 2.4w x 5pcs
Lumen:	1200lm
Colour Temp:	3000K/4000K
Body finish:	White/Black
Baffle:	Black/White/Piano Black
CRI:	>90
Beam angles:	15°, 30°, 45°
Dimmable	DALI, TRIAC,1-10V
Life Span:	Up to 50,000 Hours

* IES Files are available on request

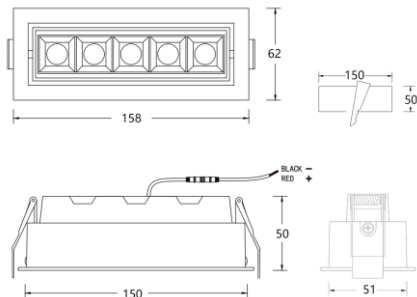

Order Code	Wattage	Beam Angle	Colour Temp	Trim/Reflector colour
LUMA1231BB	12W	15°	3000K	B/B

- Please contact our sales team for specific requirements and order code

