



# SLIM-R

## TECHNICAL SPECIFICATIONS

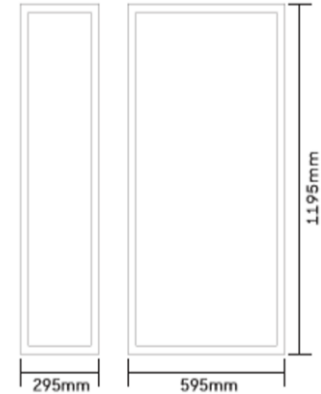

SVL Lighting

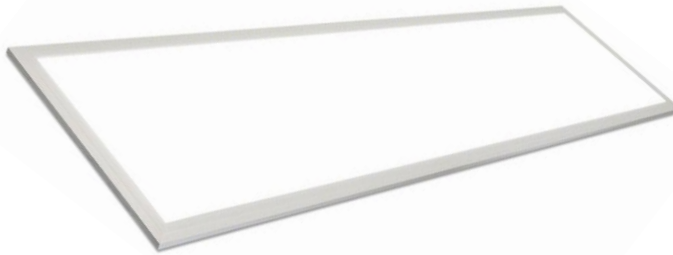

IP20

- Flicker-Free LED Panel
- High brightness SMD LEDs
- Constant current driver
- IPART approved
- Suitable for T-Bar grid system
- can be recessed, surface mounted or suspended
- Ideal for all types of Hospitality, Commercial, Education, Office and Retail application

**Dimensions:** 1195mm x 295mm  
1195mm x 595mm

**Colour Rendering** >80

**Colour Temp:** 4000K

**Finish colour:** White

**Beam Angle:** 120°

**Power Factor:** >0.90

**Power:** 40W

**Lumens** 4000lm

**Dimmable** Yes

**Lifespan** 50,000 hrs

\* IES Files are available on request

Order Code	Wattage	Beam Angle	Colour Temp	Trim colour
PAN404WR	40W	120D	4000K	W

\* Please contact our sales team for specific requirements and order code

