



# SNAKE 1018S



SVL Lighting

## TECHNICAL SPECIFICATIONS



- Horizontal bending & side lighting LED Neon Lite
- Seamless and uniform light output, Dot -Free
- UV and yellowing resistant
- IP67 and salt-mist proof
- Robust housing with high quality silicon, UV proof for outdoor application.
- Easy installation with clips and bendable track
- Cut-able for flexible application
- Extrusion and accessories available

### Controllers:

- Zigbee Remote Controller
- Touch Controller
- TRIAC
- DALI
- 1-10V

<b>Dimensions:</b>	(W)10mm x (H)18mm
<b>Power (W/M)</b>	14W
<b>Voltage(V):</b>	24V
<b>Lumens per Meter:</b>	460lm-500lm/m
<b>CRI:</b>	>90
<b>Cutting Increment:</b>	50mm
<b>Colour Temperature:</b>	3000K/4000K/6000K
<b>Power factor:</b>	>0.9
<b>Beam Angle:</b>	120°
<b>Working Temperature (°C)</b>	-25~60
<b>Storage Temperature(°C) :</b>	-30~80

\* IES Files are available on request

Order Code	Wattage	Lumen	Colour Temp
SNAS143-1018	14w/m	460lm/w	3000K
SNAS144-1018	14w/m	480lm/w	4000K

\* Please contact our sales team for specific requirements and order code




SVL Lighting

TECHNICAL SPECIFICATIONS


CONNECTORS:

- IP67 Power feed and end cap



Side feeder




End feeder



Bottom feeder

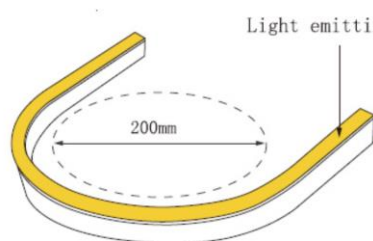

Min bending diameter

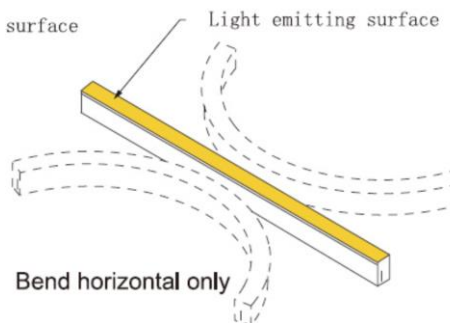

Bend horizontal only

Aluminium Profile

