


BONGO 104



SVL Lighting

TECHNICAL SPECIFICATIONS

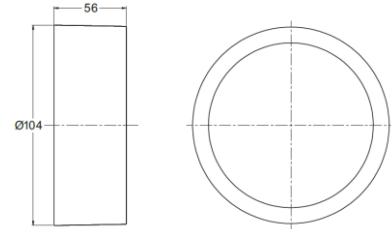

- Surface mounted downlight
- Special Optic reflector, precise light distribution
- No glare with soft and tender light
- No UV, good heat dissipation
- Ideal for applications in shopping mall, foyers, hotels, corridors, function rooms, living area,

Dimensions: Ø 104mm x 56mm

Cut out: Surface mounted

Power Consumption: 8w

Finish Colour: White

CRI: >80

Colour Temp: 3000K, 4000K

Power Factor: >0.9

Lumens 600lm

Beam Angle: 90°


Dimmable: DALI, TOUCH DIM, 1-10V

Life Span: 50,000 hrs

Order Code	Wattage	Beam Angle	Colour Temp	Trim colour
BONA83W	8W	90°	3000K	W
BONA84W	8W	90°	4000K	W

* Please contact our sales team for specific requirements and order code

Luminous Intensity Distribution Diagram

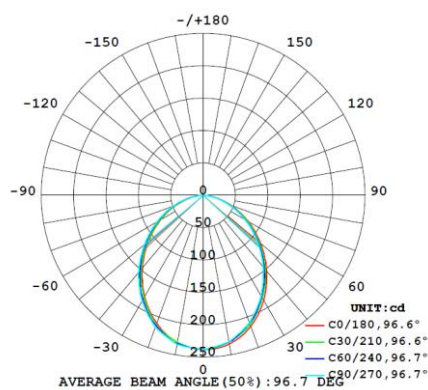

* IES Files are available on request

