


HERMES C

TECHNICAL SPECIFICATIONS



SVL Lighting

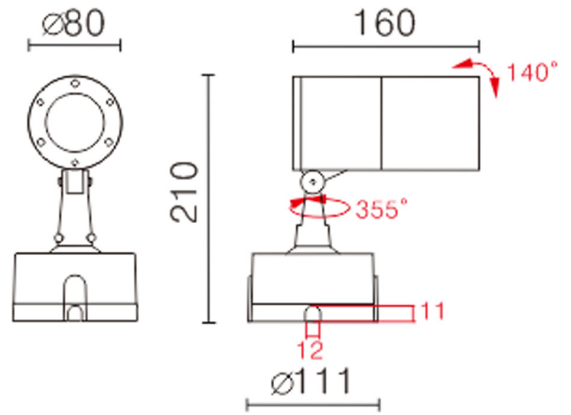


ROHS CE e IP66

- Elegant Exterior LED adjustable spotlight.
- Pressure Die Cast Aluminium Body.
- IP66 and IK06 protection.
- Deep Conical Reflector provides low glare.
- 355° rotation with 140° Tilt.
- Honey Comb & Elliptical Lens accessories available.
- Ideal for highlighting building facades, architectural features, landscape & security lighting.


| | |
|-----------------------------|------------------------------|
| POWER CONSUMPTION | 25.5 Watts |
| IP RATING | IP66 IK06 |
| LUMINOUS FLUX | 3400lm |
| EFFICACY | 120 lm/w |
| BEAM ANGLE | 15°, 24° & 36° |
| COLOUR TEMPERATURE | 355° rotation with 140° tilt |
| CRI | 3000K & 4000K |
| MOUNTING ARRANGEMENT | >85 |
| DIMENSIONS | Ø 116mm x 201mm |
| POWER FACTOR | >0.90 |
| POWER SUPPLY | 100-240V 50-60Hz |
| LIFE SPAN | 50,000 Hrs |

| CODE | WATTS | CRI | COLOUR TEMP | LUMENS |
|---------|-------|-----|-------------|--------|
| HER253B | 25.5W | >80 | 3000K | 3400lm |
| HER254B | 25.5W | >80 | 4000K | 3400lm |

LIGHT DISTRIBUTION

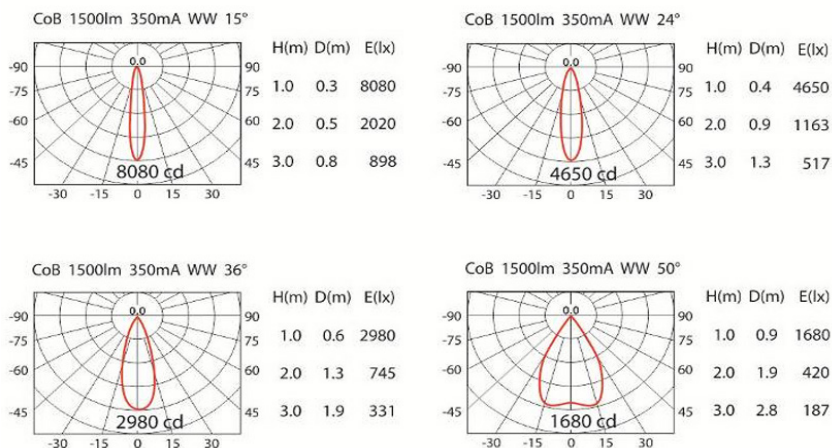

AVAILABLE ACCESSORIES



* IES files are available on request