


VIVA B

TECHNICAL SPECIFICATIONS



SVL Lighting

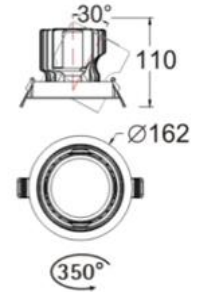

- Recessed adjustable LED downlight
- 350° rotating and 30° tilt
- Philips LED chip, Osram LED driver
- Simple and elegant appearance
- Soft and tender light perfectly present object without blackspot or dark area
- Module can separate from housing
- Available in various custom outputs
- Opal Diffuser available on request
- Ideal for applications in hospitality, retail, commercial and shop lighting

Dimensions: D:162mm x H:110mm

Cut out: 150mm

Power Consumption: 19W, 25W, 28W, 32W

Finish Colour: White/Black

CRI: 83 & 90

Colour Temp: 3000K/4000K

Power Factor: >0.95

Lumens

19W @ 1800lm
25W @ 2400lm
28W @ 2700lm
32W @ 3000lm

Beam Angle: 15°, 24°, 40°, 60°


Dimmable: Leading & Trailing, DALI ,DSI, Touch dim

Life Span: Up to 50,000 hrs

* IES Files are available on request

Order Code	Wattage	Beam Angle	Colour Temp	Trim colour
VIVB2834W	28W	60D	3000K	W
VIVB2844B	28W	60D	4000K	B
VIVB3234W	33W	60D	3000K	W
VIVB3244B	33W	60D	4000K	B

Luminous Intensity Distribution Diagram

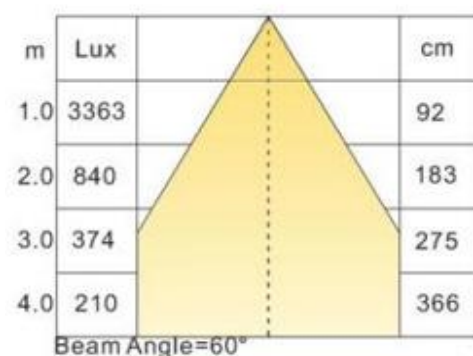

- Please contact our sales team for specific requirements and order code