

SENTO E

TECHNICAL SPECIFICATIONS



SVL Lighting



ROHS CE IP40

- Recessed LED adjustable downlight
- Deep conical housing for low glare
- 150 tilt angle adjustment
- Minimal trim to integrate with ceiling
- Clear tempered glass
- IP54 LED Module
- Leading & trailing edge driver
- Ideal for use in foyers, hotels, corridors, function rooms, living areas, kitchens and bedrooms



Code	Wattage	Colour Temp	Trim	Lumens
SENE133W	13.5W/18.5W	3000K	W	950/1600lm
SENE134W	13.5W/18.5W	4000K	W	950/1600lm
SENE133B	13.5W/18.5W	3000K	B	950/1600lm
SENE134B	13.5W/18.5W	4000K	B	950/1600lm


Available Lamp Options

- SENE183W 18.5W 3000K CREE COB LED Module
- SENE184B 18.5W 4000K CREE COB LED Module

Trim Colours



Luminous Intensity Distribution Diagram

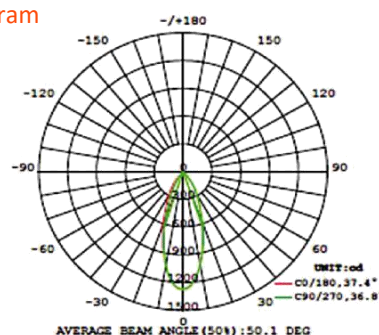

Diameter:	100mm
Dimensions:	H: 105mm & 130mm
Cut out:	90mm
Colour Rendering Index CRI:	95
Colour Temp (CCT):	3000K, 4000K
Beam Angle:	15, 25, 38, 60D
Power Consumption:	13.5W @ 300mA 18.5W @ 500mA
Power Factor:	> 0.9
Lumen of Chip & Luminaire	13.5W @ 950lm 18.5W @ 1600lm
Dimmable:	DALI, DSI, Touch Dim, 1-10V
Lifespan:	Up to 50,000 hrs

* IES Files are available on request